




ARKLE

ARTWORK AND GALLERY STORAGE

PRODUCT FEATURES

ARKLE gallery solutions allow for the maximum utilisation of space for artwork and object storage, removing the need to handle individual items and ultimately reducing the risk of damage to artefacts.

With variations in both wall mounted (01) and pull-out (02) solutions, systems can be tailored to meet bespoke building or object storage requirements.

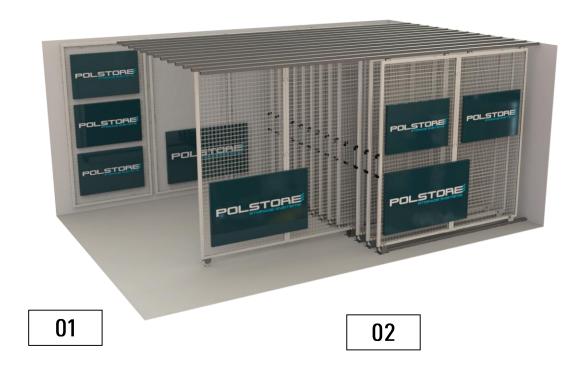

Popular RAL colour choices include:

RAL9016	RAL9010	RAL1013	RAL9002	RAL7035	RAL7036	RAL7021	RAL9005
TRAFFIC WHITE	PURE WHITE	OYSTER WHITE	GREYWHITE	LIGHT GREY	NEVIS GREY	BLACK GREY	JET BLACK
RAL5012	RAL5005	RAL6005	RAL6037	RAL10237	RAL2003	RAL3020	RAL3003
	SIGNAL BLUE	moss green	PURE GREEN	TRAFFIC YELLOW	PASTEL ORANGE	traffic red	RUBY RED

PLEASE CONTACT US TO MAKE AN ENQUIRY OR TO DISCUSS YOUR CUSTOM ARKLE SOLUTION.

01

STATIC FRAMES FOR WALL OR FLOOR & CEILING MOUNTING


- Wall racks racks require a suitable supporting wall or concrete floor for fixing
- 25Kg per square metre load limit per frame
- Units can be ordered to any RAL finish
- · High quality steel construction
- 50 x 50mm aperture to mesh
- All frames have a thickness of 40mm

Arkle racking systems can be tailored to meet individual briefs:

- Bespoke size requirements
- Special storage requirements
- Room and environmental constraints

PLEASE CONTACT US TO MAKE AN ENQUIRY OR TO DISCUSS YOUR CUSTOM ARKLE SOLUTION.


HEIGHT	WIDTH	PART NO.
1850	1250	ARK01-1812
2460	1250	ARK01-2412
2950	1860	ARK01-2112
2460	1860	

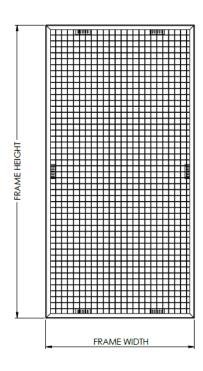




STATIC FRAMES FOR WALL OR FLOOR & CEILING MOUNTING PLANNING DIMENSIONS

Solution using frames fixed directly into supporting walls, suitable for most applications:

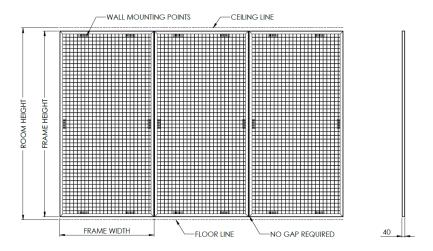

Solution using frames secured into floor and ceiling; for fixing without reinforced walls and extreme heavy duty applications:

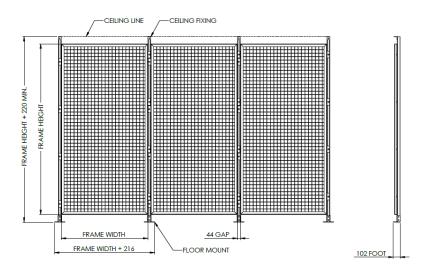

PULL OUT FRAMES FOR FLOOR AND CEILING MOUNTING


- A maximum of two frames can be joined per sliding rack
- Heavy duty castor and roller bearing system guarantees smooth operation
- 25Kg per square metre load limit per sliding rack
- Floor-loaded system does not require a mezzanine floor to be installed Units can be ordered to any RAL finish
- High quality steel construction
- Heavy-duty black pull handle
- All frames have a thickness of 40mm
- 50 x 50mm aperture to mesh

Arkle racking systems can be tailored to meet individual briefs:

- Bespoke size requirements
- Special storage requirements
- Room and environmental constraints

PLEASE CONTACT US TO MAKE AN ENQUIRY OR TO DISCUSS YOUR CUSTOM ARKLE SOLUTION.


HEIGHT	WIDTH	PART NO.
1850	1250	
2460	1250	
2950	1860	
2460	1860	

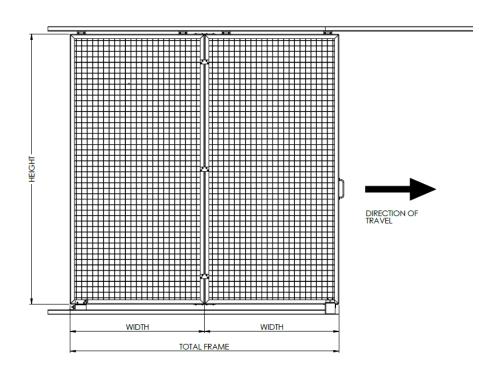


02

PULL OUT FRAMES PLANNING DIMENSIONS


Space Planning Dimensions:

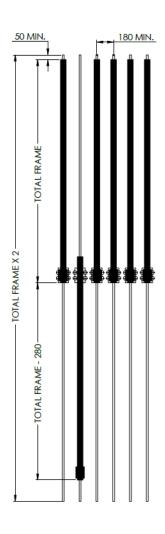

Solution using top guide rail fixed directly into ceiling, for room heights up to 3110mm:



Solution using floating rails for room heights above 3110mm or bespoke applications:



PLEASE CONTACT US TO CHECK WICH SOLUTION BEST MEETS YOUR REQUIREMENTS AND ENVIRONMENT CONSTRAINTS.